ENDOORS Srl.
Via Argine Maestro del Po, 9
43010 Polesine Parmense / PR
ITALY
VAT IT02561400348

info@en-doors.com - *commercial and sales office*
info@endoors.it - *production, administration, shipping*
Tel. 0524 936538
Fax 0524 936544
www.endoors.it

SD T2-Rev. 1/11

❑ QUOTATION ❑ ORDER

MONOLATERAL TELESCOPIC (T2) MODULAR SLIDING DOOR FIRE FIXING® REI 120

Customer _____ Date _____

Item code _____ Page n° _____ of pages _____

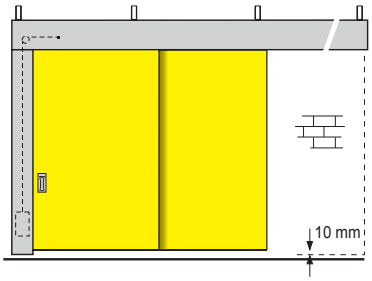


Modules subject to deformation

- All pictures are illustrative and out of scale.
- All dimensions are expressed in millimetres.
- The type approval number will be assigned when order or production is confirmed.

① *Check door sizes and/or contact our Technical Office for overall dimensions.*

② *Rear overall dimensions increase by 140 mm in case an electromagnet CC 2800N is present.*

③ *If HN > 7150 the upper and lower stiffening structure dimensions may differ from usual ones and the handle may be placed higher on the door. Contact our Technical Office to verify feasibility.*

NOTES:
- Elements providing fire compartimentation. Do not use inappropriately.
- Do not install in places subject to direct air flow.
- The choice of door retaining system through electromagnet or thermal fuse is to the customer's charge and risk
- Mounting to be carried out by specialized personnel only.
- Mount only on flat plumb vertical structures or compartments.
- For special requirements, please indicate available spaces and contact our Technical Office.
- Precautions during use and risk analysis are to be defined by the customer.

❑ CONCRETE BEAM



❑ CEILING
(fixing through brackets or tie rods)



❑ BEAM WITHIN HEIGHT



❑ FRONT COUNTER-WEIGHT

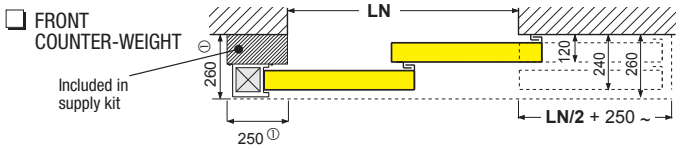

❑ OPPOSITE SIDE COUNTER-WEIGHT

Wall reveal to be built after door installation at customer's expenses

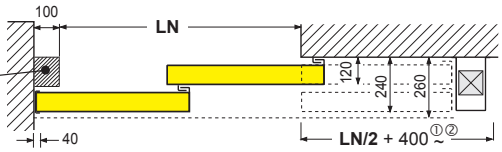

N° _____ DIM. **LN** _____ mm **x HN** ③ _____ mm

Door retaining system through: ❑ Electromagnet ❑ Thermal fuse

The choice of the fuse may impair the functioning of the door.

OPENING: ❑ LEFT ❑ RIGHT

The MODULAR SLIDING DOOR FIRE FIXING® REI 120 includes sliding guide and prime coat RAL 7035. It does not include the door lock.

	n°	Price €	%	Net price €	Amount €
SAM SHOCK ABSORBER					
V.T. VISCOTROLLER (CRUISE CONTROL)					
ELECTROMAGNET 24 V d.c. ❑ CC 600N ❑ CC 1400N ❑ CC 2800N ②					
NC RELEASE BUTTON					
1 Firux® I.S.D. SUPPLIER + 2 THERMAL DETECTORS — Have to be installed on doors without any centralized monitoring system (choice to be preferred).					
NIGHT LOCK (verify feasibility if LN < 1500 mm)					
SIZES ❑ NORMAL ❑ SP ① (350 mm) ❑ R ① (MIN. 350 mm)					
OPPOSITE SIDE COUNTER-WEIGHT					
BEAM 250x100x _____ mm, HV _____ mm					
SPECIAL FIXING TIE RODS (OR BRACKETS) X _____ mm (Each case requires a relevant quote)					
RAL OVEN-HARDENED SATIN FINISH _____					
TOTAL € (VAT excluded)					

General and particular sales conditions including delivery times are given in annex form of offer or order confirmation. Excluding transportation, unloading from truck or container, installation, destination taxes and charges. Packing included. Every single order to become economically and technically engaging must be confirmed in writing by Endoors srl. since before the formalization of the order the product or documentation may have changed. Incomplete forms to become effective must be completed both for offers and orders.

Special notes

Seal and signature for acceptance and confirmation of order

INCOMPLETE FORMS WILL NOT BE PROCESSED.

The manufacturer reserves the right to modify the product and all relevant technical documents without notice. Please verify that the present form is valid when filling it out.